



## Luminaire


# Rofo

250-K0CI-10GEE/840, W




The word integration perfectly describes the Rofo-S luminaires. The luminaires can literally be clicked into the metal ceiling system of leading manufacturers Knauf, Hunter Douglas, Dampa and T-Bar. The luminaires thus form an integral part of the ceiling as they are without a visible frame. The advantage is not only the ease of installation, but also the elegant design of the entire lighting system. The luminaire width is 100 mm and the luminaire lengths are, of course, multiples of 600 mm with regard to standardised ceiling dimensions. Thanks to the opal variant, but above all the microprismatic optical material, the specific power of up to 130lm/W and the luminous flux of 2000 lm/m while maintaining UGR<19, the luminaires are perfect for offices. But they also serve well in corridors, meeting rooms, auditoriums or laboratories.

## Technical drawing

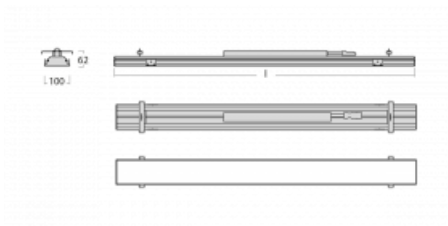

Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	5 years
Description of luminaires	Luminaire recessed
item description	Knauf; Adels connector
Dimensions (l × w × h mm)	600 mm × 100 mm × 62 mm
Light source	LED MODUL
DIR optical system	Microprisma
Luminous flux*	830 lm
Colour Temperature	4000 K cool white
Luminous efficacy	136 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	17.8

## Curve

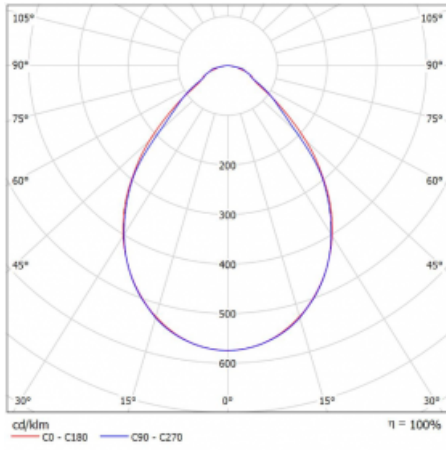

Luminaire power input\* 6.1 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)