



## Luminaire


# Rofo

250-K0CI-10GGE/830, W




The word integration perfectly describes the Rofo-S luminaires. The luminaires can literally be clicked into the metal ceiling system of leading manufacturers Knauf, Hunter Douglas, Dampa and T-Bar. The luminaires thus form an integral part of the ceiling as they are without a visible frame. The advantage is not only the ease of installation, but also the elegant design of the entire lighting system. The luminaire width is 100 mm and the luminaire lengths are, of course, multiples of 600 mm with regard to standardised ceiling dimensions. Thanks to the opal variant, but above all the microprismatic optical material, the specific power of up to 130lm/W and the luminous flux of 2000 lm/m while maintaining UGR<19, the luminaires are perfect for offices. But they also serve well in corridors, meeting rooms, auditoriums or laboratories.

## Technical drawing

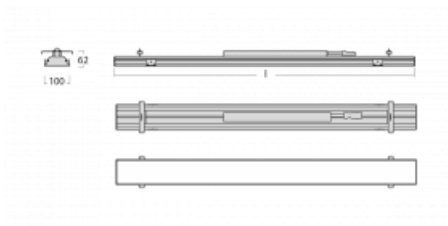

|  |                         |
|--|-------------------------|
| Type of installation                   | Recessed                |
| Light distribution                     | Direct                  |
| Luminaire shape                        | Linear                  |
| Colour of the luminaires               | White                   |
| Material                               | Aluminium               |
| Lifetime                               | L90/B50 60 000 hours    |
| Warranty                               | 5 years                 |
| Description of luminaires              | Luminaire recessed      |
| item description                       | Knauf; Adels connector  |
| Dimensions                             | 600 mm × 100 mm × 62 mm |
| Light source                           | LED MODUL               |
| Type of optical system                 | Microprisma             |
| Luminous flux*                         | 1220 lm                 |
| Colour Temperature                     | 3000 K warm white       |
| Luminous efficacy                      | 126 lm/W                |
| MacAdam Light source                   | 2                       |
| Colour rendering index                 | 80                      |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 19.1                    |

## Curve

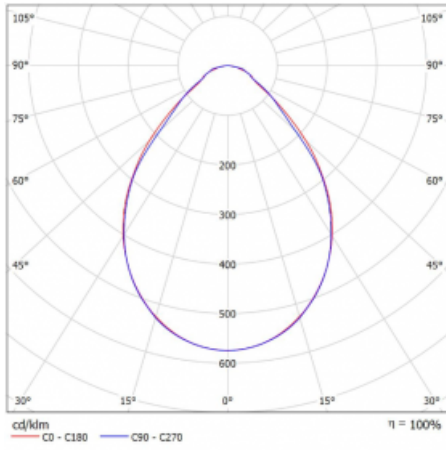

Luminaire power input\* 9.7 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)