




## Luminaire


250-K0CK-20GGD/830, W



## Technical drawing

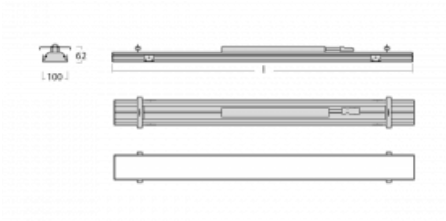

## Curve

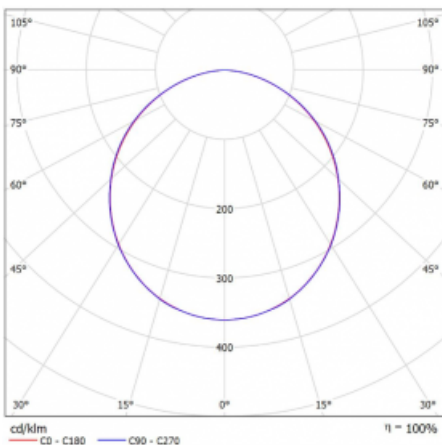

|                                   |                          |
|-----------------------------------|--------------------------|
| Type of installation              | Recessed                 |
| Light distribution                | Direct                   |
| Luminaire shape                   | Linear                   |
| Colour of the luminaires          | White                    |
| Material                          | Aluminium                |
| Lifetime                          | L90/B50 60 000 hours     |
| Warranty                          | 5 years                  |
| Description of luminaires         | Luminaire recessed       |
| item description                  | Knauf; Adels connector   |
| Dimensions<br>(l × w × h mm)      | 1200 mm × 100 mm × 62 mm |
| Light source                      | LED MODUL                |
| DIR optical system                | Opal diffuser            |
| Luminous flux*                    | 2470 lm                  |
| Colour Temperature                | 3000 K warm white        |
| Luminous efficacy                 | 130 lm/W                 |
| MacAdam Light source              | 2                        |
| Colour rendering index            | 80                       |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 23.3                     |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 19 W     |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 40

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)