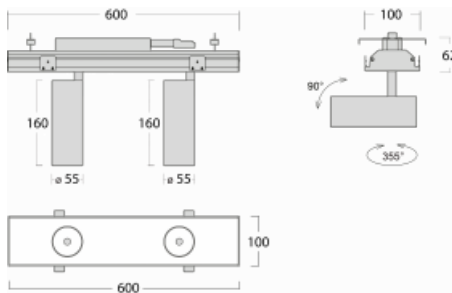



Luminaire

Rofo

250S-K0CF-20GDE/930, W


| | |
|---------------------------|------------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire recessed |
| item description | Knauf; Adels connector |

Technical drawing

 Dimensions 600 mm × 100 mm × 62 mm
(l × w × h mm)

Light source LED MODUL

DIR optical system Reflector

Luminous flux* 1200 lm


Colour Temperature 3000 K warm white

Luminous efficacy 88 lm/W

MacAdam Light source 3

Colour rendering index 90

Beam angle 45°

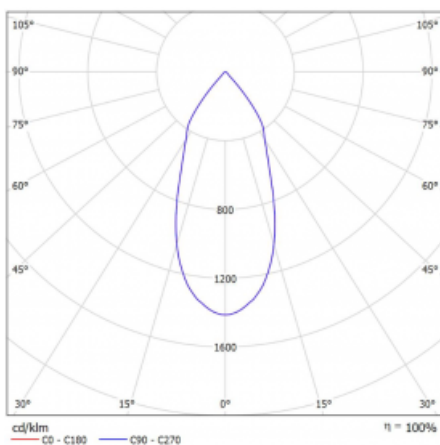Curve


| | |
|------------------------------|----------|
| Luminaire power input* | 27.2 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

  IP 20

*±10 %