




## Luminaire

# Rofo


250S-K0CF-30GGE/940, W



## Technical drawing

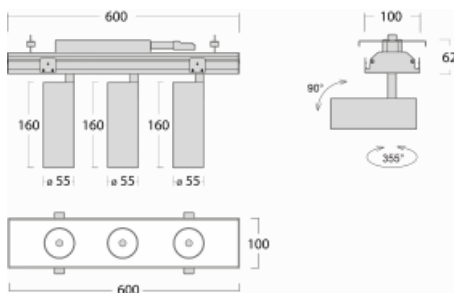

## Curve

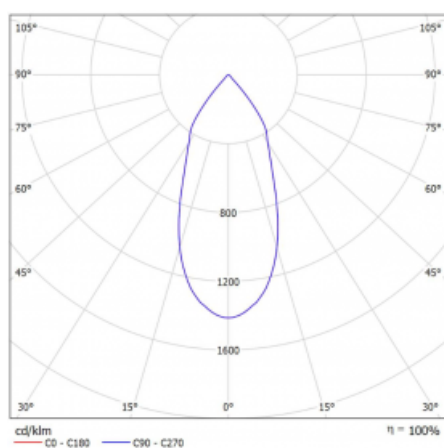

|                           |                        |
|---------------------------|------------------------|
| Type of installation      | Recessed               |
| Light distribution        | Direct                 |
| Luminaire shape           | Linear                 |
| Colour of the luminaires  | White                  |
| Material                  | Aluminium              |
| Lifetime                  | L80/B20 50 000 hours   |
| Warranty                  | 5 years                |
| Description of luminaires | Luminaire recessed     |
| item description          | Knauf; Adels connector |

|                              |                         |
|------------------------------|-------------------------|
| Dimensions<br>(l × w × h mm) | 600 mm × 100 mm × 62 mm |
| Light source                 | LED MODUL               |
| DIR optical system           | Reflector               |
| Luminous flux*               | 1750 lm                 |
| Colour Temperature           | 4000 K cool white       |
| Luminous efficacy            | 88 lm/W                 |
| MacAdam Light source         | 3                       |
| Colour rendering index       | 90                      |
| Beam angle                   | 45°                     |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 60 W     |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %