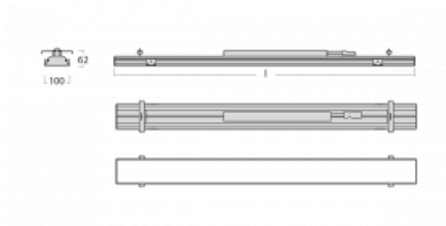
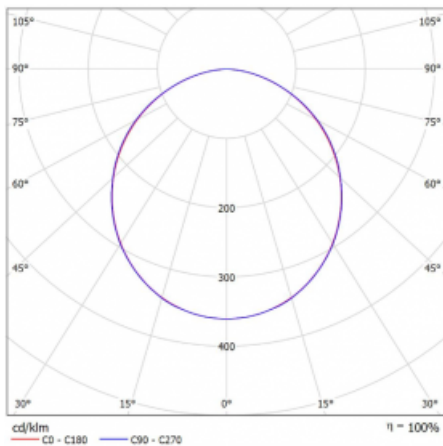



Luminaire

Rofo

250S-KOCK-20GEE/830, W


Technical drawing

Curve


| | |
|-----------------------------------|--------------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L90/B50 60 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire recessed |
| item description | Knauf; Adels connector |
| Dimensions (l × w × h mm) | 1200 mm × 100 mm × 62 mm |
| Light source | LED MODUL |
| DIR optical system | Opal diffuser |
| Luminous flux* | 1640 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 136 lm/W |
| MacAdam Light source | 2 |
| Colour rendering index | 80 |
| UGR max. X=4H Y=8H, ρ=70,50,20 | 21.9 |

| | |
|------------------------------|----------|
| Luminaire power input* | 12.1 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

  IP 40

*±10 %