


**Luminaire**

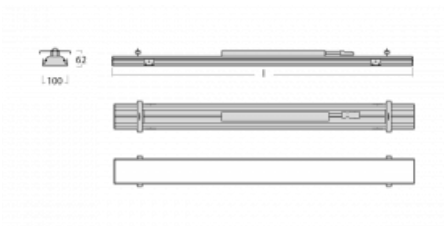
# Rofo

250S-K0CK-20GGD/830, W



Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	5 years
Description of luminaires	Luminaire recessed
item description	Knauf; Adels connector

Dimensions	1200 mm × 100 mm × 62 mm
Light source	LED MODUL

**Technical drawing**


Type of optical system	Opal diffuser
------------------------	---------------

Luminous flux*	2470 lm
----------------	---------

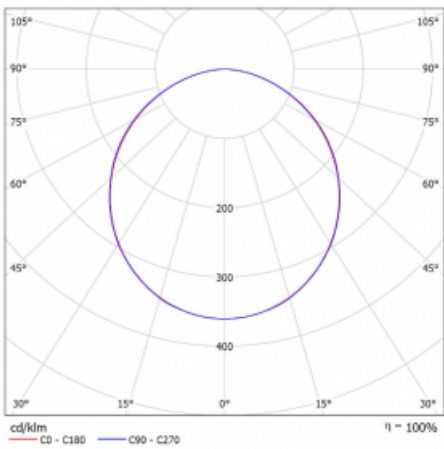
Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy	130 lm/W
-------------------	----------

MacAdam Light source	2
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H Y=8H, $\rho=70,50,20$	23.3
--	------

**Curve**


Luminaire power input*	19 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 40

\*±10 %