


Luminaire

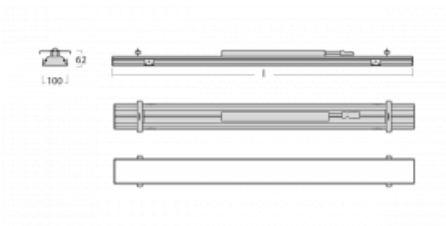
Rofo

250S-K0CK-30GGD/830, W



Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 60 000 hours
Warranty	5 years
Description of luminaires	Luminaire recessed
item description	Knauf; Adels connector

Dimensions	1800 mm × 100 mm × 62 mm
Light source	LED MODUL

Technical drawing


Type of optical system	Opal diffuser
------------------------	---------------

Luminous flux*	3710 lm
----------------	---------

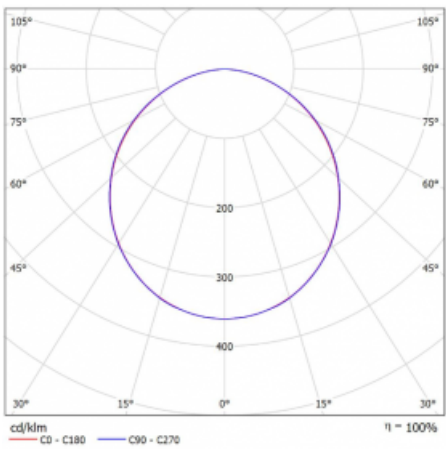
Colour Temperature	3000 K warm white
--------------------	-------------------

Luminous efficacy	131 lm/W
-------------------	----------

MacAdam Light source	2
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H Y=8H, $\rho=70,50,20$	23.3
--	------

Curve


Luminaire power input* 28.4 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

  IP 40

*±10 %