


**Luminaire**

# Rofo

**250S-K0CS-10GGD/940, W**


|                           |                        |
|---------------------------|------------------------|
| Type of installation      | Recessed               |
| Light distribution        | Direct                 |
| Luminaire shape           | Linear                 |
| Colour of the luminaires  | White                  |
| Material                  | Aluminium              |
| Lifetime                  | L80/B20 50 000 hours   |
| Warranty                  | 5 years                |
| Description of luminaires | Luminaire recessed     |
| item description          | Knauf; Adels connector |

**Technical drawing**

 Dimensions 600 mm × 100 mm × 62 mm  
 (l × w × h mm)

Light source LED MODUL

DIR optical system Reflector

Luminous flux\* 1750 lm

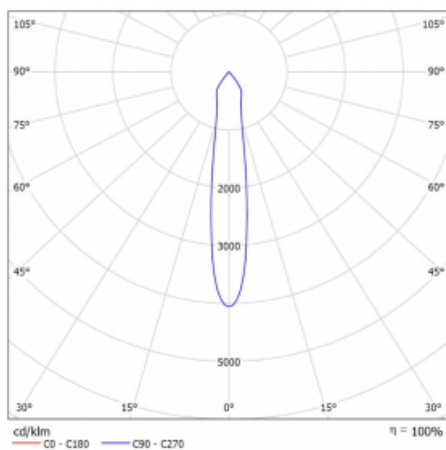
Colour Temperature 4000 K cool white

Luminous efficacy 88 lm/W

MacAdam Light source 3

Colour rendering index 90

Beam angle 17°

**Curve**


|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 20 W     |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %