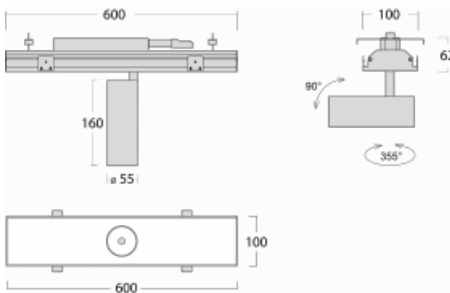
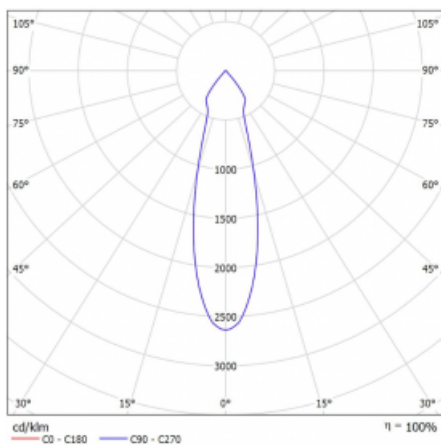



**Luminaire**

# Rofo

250S-K0CU-10GGE/940, W


**Technical drawing**

**Curve**


|                           |                         |
|---------------------------|-------------------------|
| Type of installation      | Recessed                |
| Light distribution        | Direct                  |
| Luminaire shape           | Linear                  |
| Colour of the luminaires  | White                   |
| Material                  | Aluminium               |
| Lifetime                  | L80/B20 50 000 hours    |
| Warranty                  | 5 years                 |
| Description of luminaires | Luminaire recessed      |
| item description          | Knauf; Adels connector  |
| Dimensions (l × w × h mm) | 600 mm × 100 mm × 62 mm |
| Light source              | LED MODUL               |
| DIR optical system        | Reflector               |
| Luminous flux*            | 1750 lm                 |
| Colour Temperature        | 4000 K cool white       |
| Luminous efficacy         | 88 lm/W                 |
| MacAdam Light source      | 3                       |
| Colour rendering index    | 90                      |
| Beam angle                | 27°                     |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 20 W     |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %