

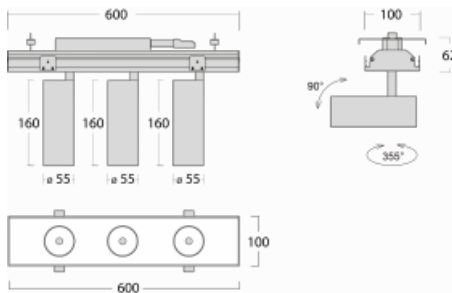
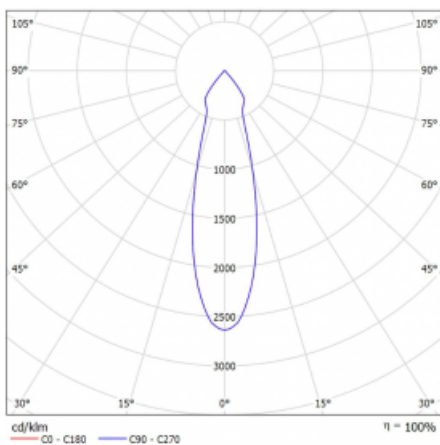

Luminaire

Rofo

250S-K0CU-30GGE/940, W



| | |
|---------------------------|------------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire recessed |
| item description | Knauf; Adels connector |

Technical drawing

Curve


| | |
|------------------------|-------------------------|
| Dimensions | 600 mm × 100 mm × 62 mm |
| Light source | LED MODUL |
| Type of optical system | Reflector |
| Luminous flux* | 1750 lm |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 88 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 90 |
| Beam angle | 27° |

| | |
|------------------------------|----------|
| Luminaire power input* | 60 W |
| Connection of the luminaires | ON/OFF |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

  IP 20

*±10 %