


**Luminaire**

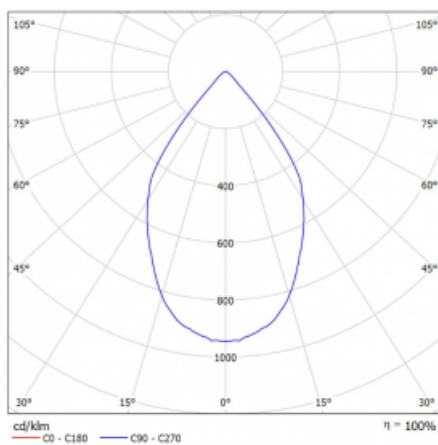
# Rofo

250S-K0CW-30GDE/940, W



|                           |                        |
|---------------------------|------------------------|
| Type of installation      | Recessed               |
| Light distribution        | Direct                 |
| Luminaire shape           | Linear                 |
| Colour of the luminaires  | White                  |
| Material                  | Aluminium              |
| Lifetime                  | L80/B20 50 000 hours   |
| Warranty                  | 5 years                |
| Description of luminaires | Luminaire recessed     |
| item description          | Knauf; Adels connector |

**Technical drawing**

**Curve**


|                        |                         |
|------------------------|-------------------------|
| Dimensions             | 600 mm × 100 mm × 62 mm |
| Light source           | LED MODUL               |
| Type of optical system | Reflector               |
| Luminous flux*         | 1250 lm                 |
| Colour Temperature     | 4000 K cool white       |
| Luminous efficacy      | 92 lm/W                 |
| MacAdam Light source   | 3                       |
| Colour rendering index | 90                      |
| Beam angle             | 68°                     |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 40.8 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

 **CE** IP 20

\*±10 %