



## Luminaire

# Shift


26-200U-20GDD/930, S



Designer Kryštof Nosál has created a luminaire with unrivalled variability. In addition, the Shift family of single luminaires allows for any method of installation. You can choose between a semi-recessed, surface and pendant version. The spot LED luminaire consists of 1, 2, 3 or 5 light sources, which can be moved along the axis of the luminaire body, tilted up to an angle of 45° and rotated up to 355°. The luminaire has 4 beam angles of 15°, 25°, 36°, 60°.


Design Kryštof Nosál

## Technical drawing

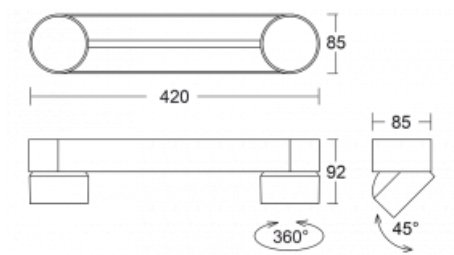

|                                        |                        |
|----------------------------------------|------------------------|
| Type of installation                   | Surface                |
| Light distribution                     | Direct                 |
| Luminaire shape                        | Rounded                |
| Colour of the luminaires               | Silver                 |
| Material                               | Aluminium              |
| Lifetime                               | L80/B20 50 000 hours   |
| Warranty                               | 5 years                |
| Description of luminaires              | Luminaire surface      |
| Dimensions<br>(l × w × h mm)           | 420 mm × 85 mm × 92 mm |
| Light source                           | LED MODUL              |
| DIR optical system                     | Reflector              |
| Luminous flux*                         | 1000 lm                |
| Colour Temperature                     | 3000 K warm white      |
| Luminous efficacy                      | 108 lm/W               |
| MacAdam Light source                   | 3                      |
| Colour rendering index                 | 90                     |
| Beam angle                             | 25°                    |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 14.7                   |

Curve

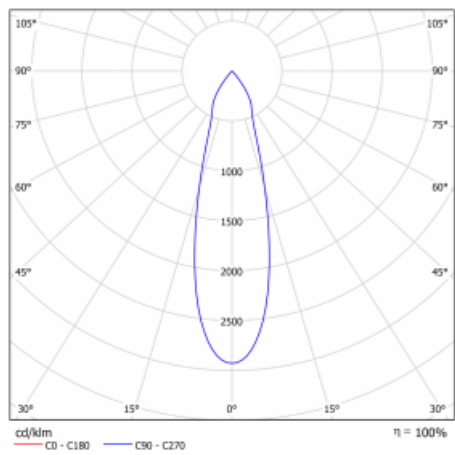

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 18.6 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

⊕ CE IP 20  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)

## Accessories



**00-01000**  
reflector 18°



**00-01001**  
reflector 25°



**00-01002**  
reflector 32°



**00-01003**  
reflector 52°



**00-01100**  
Satinice diffuser



**00-01101**  
Linear optic