


**Luminaire**

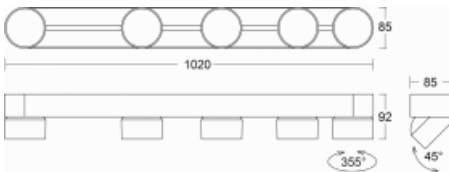
# Shift

26-500U-50GGE/940, W



Designer Kryštof Nosál has created a luminaire with unrivalled variability. In addition, the Shift family of single luminaires allows for any method of installation. You can choose between a semi-recessed, surface and pendant version. The spot LED luminaire consists of 1, 2, 3 or 5 light sources, which can be moved along the axis of the luminaire body, tilted up to an angle of 45° and rotated up to 355°. The luminaire has 4 beam angles of 15°, 25°, 36°, 60°.

Design Kryštof Nosál

**Technical drawing**


|                           |                             |
|---------------------------|-----------------------------|
| Type of installation      | Suspended                   |
| Light distribution        | Direct                      |
| Luminaire shape           | Rounded                     |
| Colour of the luminaires  | White                       |
| Material                  | Aluminium                   |
| Lifetime                  | L80/B20 50 000 hours        |
| Warranty                  | 5 years                     |
| Description of luminaires | Luminaire suspended         |
| item description          | White ceiling cup and cable |

|                                   |                         |
|-----------------------------------|-------------------------|
| Dimensions (l × w × h mm)         | 1020 mm × 85 mm × 92 mm |
| Light source                      | LED MODUL               |
| DIR optical system                | Reflector               |
| Luminous flux*                    | 1810 lm                 |
| Colour Temperature                | 4000 K cool white       |
| Luminous efficacy                 | 105 lm/W                |
| MacAdam Light source              | 3                       |
| Colour rendering index            | 90                      |
| Beam angle                        | 25°                     |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 16.7                    |

## Curve



Luminaire power input\* 86.5 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\*±10 %

## Downloads

Installation instructions



Photos



**Accessories****00-01000**  
reflector 18°**00-01001**  
reflector 25°**00-01002**  
reflector 32°**00-01003**  
reflector 52°**00-01100**  
Satinice diffuser**00-01101**  
Linear optic