



## Luminaire

# Rundo 24

290-240K-10GEM3/830, W +  
00-00334, W



Circular luminaires with an aluminium profile come in height 24 mm. Rundo24 luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

|                                   |                             |
|-----------------------------------|-----------------------------|
| Type of installation              | Suspended                   |
| Light distribution                | Direct                      |
| Luminaire shape                   | Circular                    |
| Colour of the luminaires          | White                       |
| Material                          | Aluminium                   |
| Lifetime                          | L80/B20 50 000 hours        |
| Warranty                          | 2 years                     |
| Description of luminaires         | Luminaire suspended         |
| item description                  | White ceiling cup and cable |
| Dimensions                        | ø 410 mm × 24 mm            |
| Light source                      | LED MODUL                   |
| DIR optical system                | Opal diffuser               |
| Luminous flux*                    | 1120 lm                     |
| Colour Temperature                | 3000 K warm white           |
| Luminous efficacy                 | 130 lm/W                    |
| MacAdam Light source              | 3                           |
| Colour rendering index            | 80                          |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 21.8                        |

## Technical drawing




|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 8.6 W                 |
| Connection of the luminaires | ON/OFF + 3h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |

⊕ CE IP 40

\*±10 %

## Curve

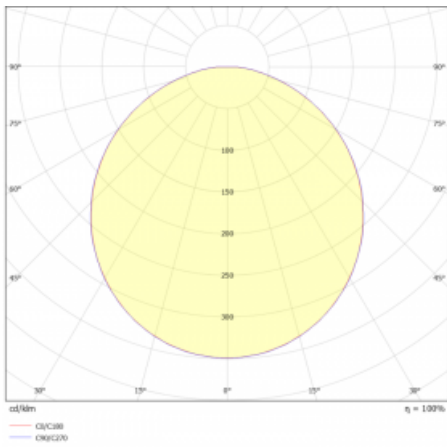

## Downloads

Installation instructions



Photos

