



## Luminaire


# Rundo 24

290-241K-10GGM3/830, W




Circular luminaires with an aluminium profile come in height 24 mm. Rundo24 luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

## Technical drawing



|  |                                |
|--|--------------------------------|
| Type of installation                   | Surface, Wall mounted          |
| Light distribution                     | Direct-indirect                |
| Luminaire shape                        | Circular                       |
| Colour of the luminaires               | White                          |
| Material                               | Aluminium                      |
| Lifetime                               | L80/B20 50 000 hours           |
| Warranty                               | 2 years                        |
| Description of luminaires              | Luminaire surface/wall mounted |
| Dimensions                             | ø 410 mm × 24 mm               |
| Light source                           | LED MODUL                      |
| DIR optical system                     | Opal diffuser                  |
| INDIR optical system                   | Opal cover                     |
| Luminous flux*                         | 3040 lm                        |
| Colour Temperature                     | 3000 K warm white              |
| Luminous efficacy                      | 138 lm/W                       |
| MacAdam Light source                   | 3                              |
| Colour rendering index                 | 80                             |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 20.1                           |

## Curve

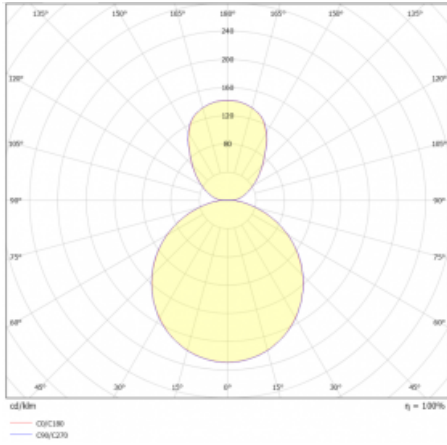

Luminaire power input\* 22.1 W

Connection of the luminaire ON/OFF + 3h emergency

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\* $\pm 10\%$

## Downloads

Installation instructions



Photos

