


**Luminaire**

# Rundo 24

290-261K-10GED/840, S



Circular luminaires with an aluminium profile come in height 24 mm. Rundo24 luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

**Technical drawing**


Type of installation	Surface, Wall mounted
Light distribution	Direct-indirect
Luminaire shape	Circular
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface/wall mounted
Dimensions	ø 630 mm × 24 mm
Light source	LED MODUL

DIR optical system	Opal diffuser
--------------------	---------------

INDIR optical system	Opal cover
----------------------	------------

Luminous flux*	2550 lm
----------------	---------

Colour Temperature	4000 K cool white
--------------------	-------------------


Luminous efficacy	150 lm/W
-------------------	----------

MacAdam Light source	3
----------------------	---

Colour rendering index	80
------------------------	----

UGR max. X=4H	17.6
Y=8H, $\rho=70,50,20$	

## Curve

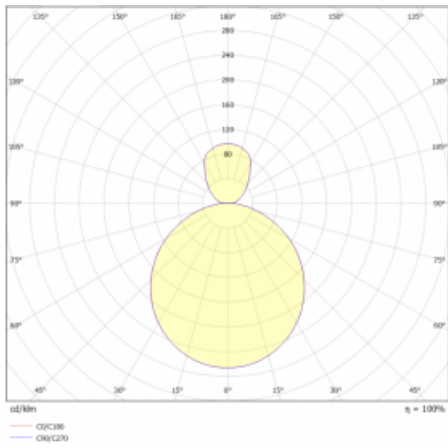

Luminaire power input\* 17 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)