



## Luminaire


# Rundo 24

290-280K-10GGE/840, S



Circular luminaires with an aluminium profile come in height 24 mm. Rundo24 luminaires feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

## Technical drawing

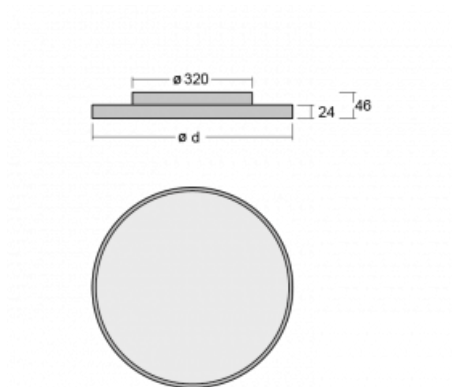

|                           |                                |
|---------------------------|--------------------------------|
| Type of installation      | Surface, Wall mounted          |
| Light distribution        | Direct                         |
| Luminaire shape           | Circular                       |
| Colour of the luminaires  | Silver                         |
| Material                  | Aluminium                      |
| Lifetime                  | L80/B20 50 000 hours           |
| Warranty                  | 5 years                        |
| Description of luminaires | Luminaire surface/wall mounted |
| Dimensions                | ø 804 mm × 24 mm               |
| Light source              | LED MODUL                      |

|                        |                   |
|------------------------|-------------------|
| DIR optical system     | Opal diffuser     |
| Luminous flux*         | 5090 lm           |
| Colour Temperature     | 4000 K cool white |
| Luminous efficacy      | 143 lm/W          |
| MacAdam Light source   | 3                 |
| Colour rendering index | 80                |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 35.5 W   |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

⚡ CE IP 40

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)