




## Luminaire


35-200K-20GGE/840, S



## Technical drawing

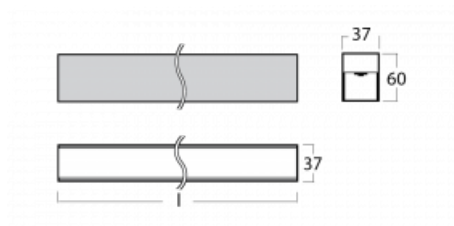

## Curve

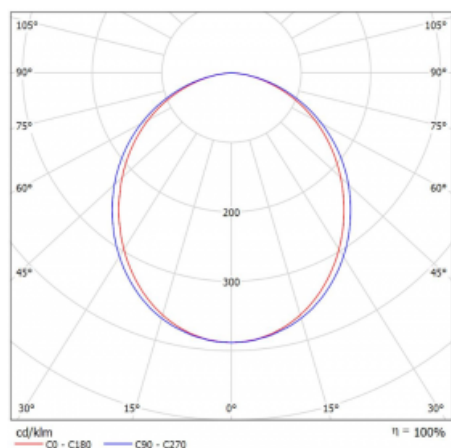

|                           |                      |
|---------------------------|----------------------|
| Type of installation      | Surface              |
| Light distribution        | Direct               |
| Luminaire shape           | Linear               |
| Colour of the luminaires  | Silver               |
| Material                  | Aluminium            |
| Lifetime                  | L90/B50 50 000 hours |
| Warranty                  | 5 years              |
| Description of luminaires | Luminaire surface    |

|                                   |                         |
|-----------------------------------|-------------------------|
| Dimensions<br>(l × w × h mm)      | 1131 mm × 37 mm × 60 mm |
| Weight                            | 1.9 kg                  |
| Light source                      | LED MODUL               |
| DIR optical system                | Opal diffuser           |
| Luminous flux*                    | 1990 lm                 |
| Colour Temperature                | 4000 K cool white       |
| Luminous efficacy                 | 90 lm/W                 |
| MacAdam Light source              | 2                       |
| Colour rendering index            | 80                      |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 26.4                    |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 22 W     |
| Connection of the luminaires | ON/OFF   |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)