




Luminaire


35-200K-50GGE/830, S



Technical drawing

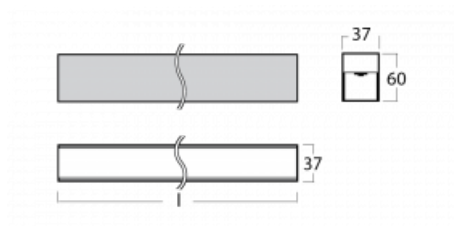

Curve

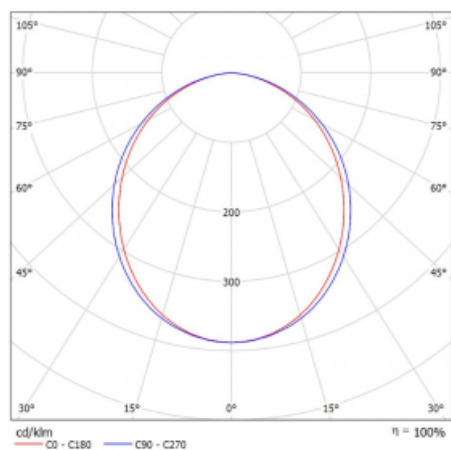

Type of installation	Surface
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface

Dimensions (l × w × h mm)	2814 mm × 37 mm × 60 mm
Weight	4.2 kg
Light source	LED MODUL
DIR optical system	Opal diffuser
Luminous flux*	4720 lm
Colour Temperature	3000 K warm white
Luminous efficacy	86 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	26.2

Luminaire power input*	55.1 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)