




Luminaire


35S-200K-80GEE/830, B



Technical drawing

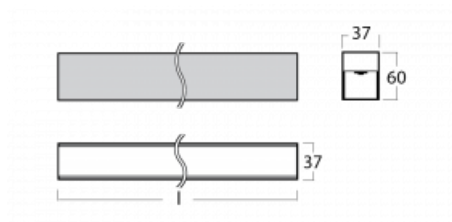

Curve

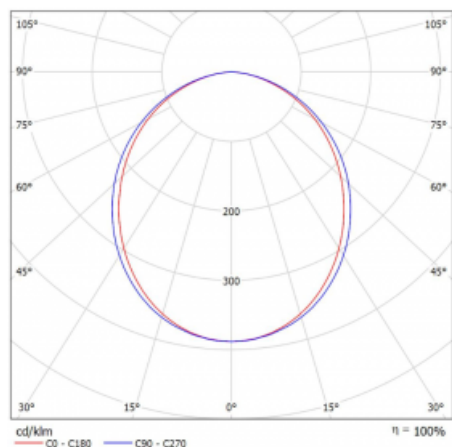

Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface/suspended
Dimensions (l × w × h mm)	4488 mm × 37 mm × 60 mm
Light source	LED MODUL
DIR optical system	Opal diffuser
Luminous flux*	5520 lm
Colour Temperature	3000 K warm white
Luminous efficacy	89 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	25.1

Luminaire power input*	61.8 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00350, B
cable 3x0,75 1000mm,
black



00-00352, B
cable 3x0,75 2000mm,
black



00-00358, B
cable 3x0,75 4000mm,
black



00-00360, B
cable 3x0,75 6000mm,
black



00-00363, K
cable 5x1,5 2000mm




00-00364, K
cable 5x1,5 4000mm



00-00365, K
cable 5x1,5 6000mm



00-00370, B
ceiling cup 80x80x32mm



35-00200, F
straight connector



35-00300, N
wire suspension
2000mm



35-20101, B
2xend cap - metal, 5-
conductor terminal box,
grommet