



Luminaire


Lina45-T

45-600I-20GGD/830, S




The Lina45-T luminaires are based on the concept of Lina45 luminaires. In this case, however, the luminaires are installed in three-circuit tracks. These track luminaires with a profile width of only 45 mm are suitable for supplementing accent lighting provided by other luminaires from our product range, for example Vali55-T. With its diffused light, Lina45-T helps to balance the lighting in the room by illuminating the communication zones, especially in the sales areas. The luminaires feature a support adapter in which the luminaire can be rotated along the Z axis thus modifying the arrangement of the system and also partially direct the light in a given space.

Technical drawing

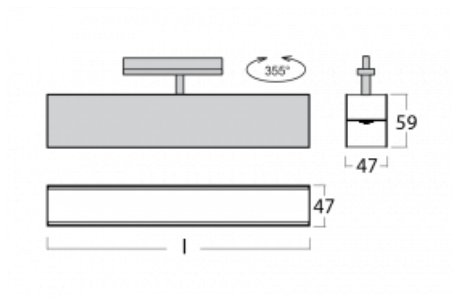

Type of installation	3 circuit track
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire 3 circuit track
Dimensions (l × w × h mm)	1127 mm × 47 mm × 59 mm
Light source	LED MODUL
DIR optical system	Microprisma
Luminous flux*	2050 lm
Colour Temperature	3000 K warm white
Luminous efficacy	82 lm/W
MacAdam Light source	2
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	21.5

Curve

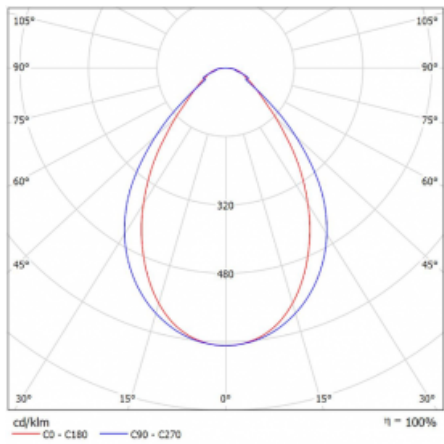

Luminaire power input*	25 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz

 **CE** IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)