




## Luminaire

45-600Z-20GGD/840, B



## Technical drawing

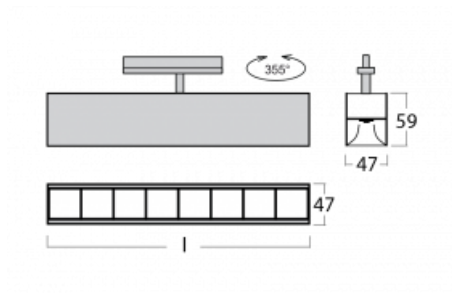

|                                   |                           |
|-----------------------------------|---------------------------|
| Type of installation              | 3 circuit track           |
| Light distribution                | Direct                    |
| Luminaire shape                   | Linear                    |
| Colour of the luminaires          | Black                     |
| Material                          | Aluminium                 |
| Lifetime                          | L80/B20 50 000 hours      |
| Warranty                          | 5 years                   |
| Description of luminaires         | Luminaire 3 circuit track |
| Dimensions<br>(l × w × h mm)      | 1127 mm × 47 mm × 59 mm   |
| Light source                      | LED MODUL                 |
| DIR optical system                | Plastic louvre low UGR    |
| Luminous flux*                    | 3930 lm                   |
| Colour Temperature                | 4000 K cool white         |
| Luminous efficacy                 | 128 lm/W                  |
| MacAdam Light source              | 2                         |
| Colour rendering index            | 80                        |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 18.5                      |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 30.7 W   |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

  IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)