




Luminaire

56-283K-10GHD/840, B




Type of installation	Surface
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface
Dimensions	ø 185 mm × 240 mm
Light source	LED MODUL

Technical drawing



DIR optical system	Opal diffuser
Luminous flux*	2420 lm
Colour Temperature	4000 K cool white
Luminous efficacy	99 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, ρ=70,50,20	18.7

Curve

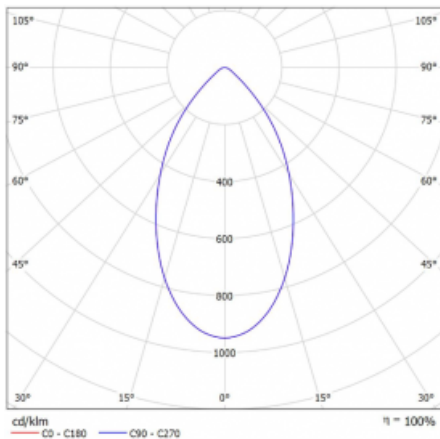

Luminaire power input* 24.5 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

 **CE** IP 20

*±10 %

Downloads

Installation instructions



Photos



Accessories



00-00399, B
suspension set
2000mm, 1 pcs.of
wires, cable
5x0,75mm, ceiling
cup