



## Luminaire


# Ture-C

56-283L-10GDM/840, B




It is a cylindrical seated luminaire that has an excellent UGR<19, which means that the luminaire does not glare. The luminaire can be used in offices, meeting rooms and thanks to special sources also in showrooms. RealWhite accentuates the white, StrongColour accentuates the selected colour and RealColour accentuates the actual colour. With Tunable White you adjust the chromaticity temperature according to the time of day. With these sources, illuminated objects look even more appealing.

## Technical drawing

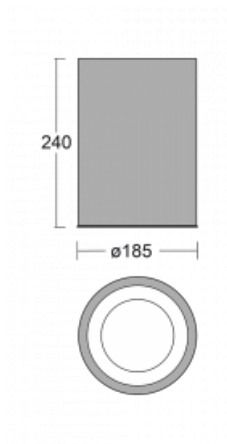

|                                   |                           |
|-----------------------------------|---------------------------|
| Type of installation              | Surface                   |
| Light distribution                | Direct                    |
| Luminaire shape                   | Circular                  |
| Colour of the luminaires          | Black                     |
| Material                          | Aluminium                 |
| Lifetime                          | L80/B20 50 000 hours      |
| Warranty                          | 2 years                   |
| Description of luminaires         | Luminaire surface         |
| Dimensions                        | ø 185 mm × 240 mm         |
| Light source                      | LED MODUL                 |
| DIR optical system                | Plain aluminium reflector |
| Luminous flux*                    | 1220 lm                   |
| Colour Temperature                | 4000 K cool white         |
| Luminous efficacy                 | 127 lm/W                  |
| MacAdam Light source              | 3                         |
| Colour rendering index            | 80                        |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 15                        |

Curve

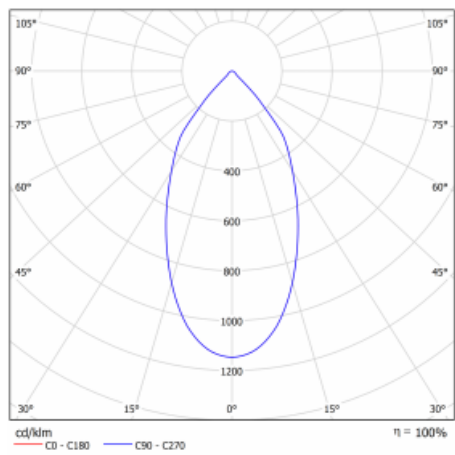

|                              |                       |
|------------------------------|-----------------------|
| Luminaire power input*       | 9.6 W                 |
| Connection of the luminaires | ON/OFF + 1h emergency |
| Electrical voltage           | 220-240V              |
| Frequency                    | 50/60Hz               |

  IP 20  
\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)