




Luminaire


57-283L-10GDD/840, B



Technical drawing

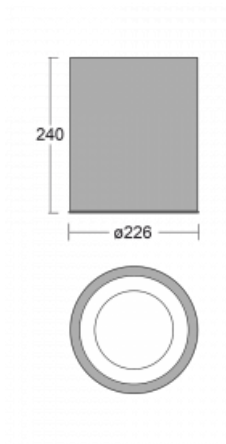

Curve

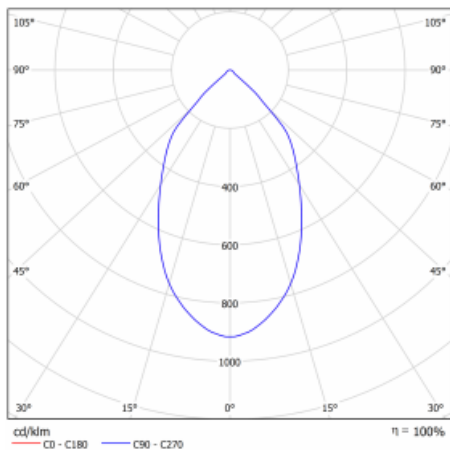

Type of installation	Surface
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L80/B20 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface
Dimensions	ø 226 mm × 240 mm
Light source	LED MODUL
DIR optical system	Plain aluminium reflector
Luminous flux*	1550 lm
Colour Temperature	4000 K cool white
Luminous efficacy	131 lm/W
MacAdam Light source	3
Colour rendering index	80
UGR max. X=4H Y=8H, $\rho=70,50,20$	16.3

Luminaire power input*	11.8 W
Connection of the luminaires	DALI
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 20

*±10 %

Downloads

[Installation instructions](#)[Photos](#)

Accessories



00-00399, B
suspension set
2000mm, 1 pcs.of
wires, cable
5x0,75mm, ceiling
cup