



Luminaire


Basi 2.0

71-006S-10GDV/940, B +
00-00157D



We have expanded the Basi family with new small siblings. We offer the new additions in white at no extra charge. They achieve maximum luminous fluxes of 650 lm and 1500 lm and a colour rendering index of Ra90. These unobtrusive but efficient downlights have beam angles of 15°, 24°, 36° (40°).


Technical drawing

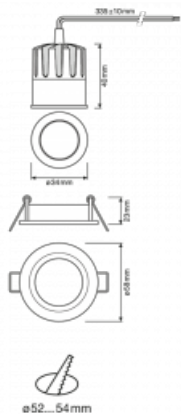

Type of installation	Recessed
Light distribution	Direct
Luminaire shape	Circular
Colour of the luminaires	Black
Material	Aluminium
Lifetime	L70/B50 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire recessed
item description	Basi 2.0 - 35 mm

Dimensions	ø 58 mm × 63 mm
Light source	LED MODUL
DIR optical system	SPOT - narrow angle
Luminous flux*	470 lm
Colour Temperature	4000 K cool white
Luminous efficacy	80 lm/W
MacAdam Light source	3
Colour rendering index	90
Beam angle	15°

Curve

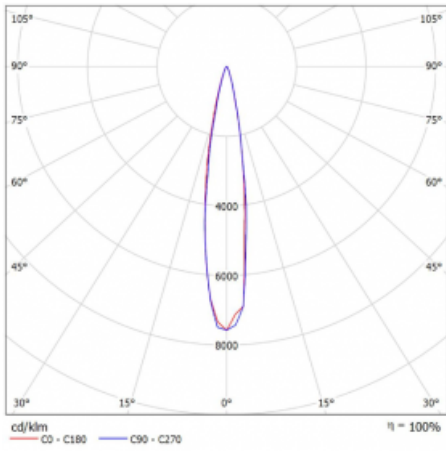

Luminaire power input* 5.9 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

☐ CE IP 20

*±10 %

Downloads

Installation instructions



Photos

