



Luminaire


Basi 2.0

71-006U-10GDV/940, W +
00-00157D




We have expanded the Basi family with new small siblings. We offer the new additions in white at no extra charge. They achieve maximum luminous fluxes of 650 lm and 1500 lm and a colour rendering index of Ra90. These unobtrusive but efficient downlights have beam angles of 15°, 24°, 36° (40°).

Technical drawing

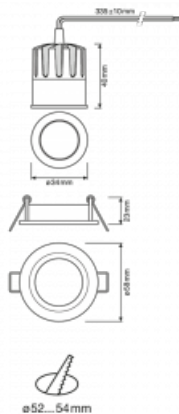

| | |
|---------------------------|-----------------------|
| Type of installation | Recessed |
| Light distribution | Direct |
| Luminaire shape | Circular |
| Colour of the luminaires | White |
| Material | Aluminium |
| Lifetime | L70/B50 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire recessed |
| item description | Basi 2.0 - 35 mm |
| Dimensions | ø 58 mm × 63 mm |
| Weight | 0.15 kg |
| Light source | LED MODUL |
| DIR optical system | MEDIUM - middle angle |
| Luminous flux* | 620 lm |
| Colour Temperature | 4000 K cool white |
| Luminous efficacy | 105 lm/W |
| MacAdam Light source | 3 |
| Colour rendering index | 90 |
| Beam angle | 24° |

Curve

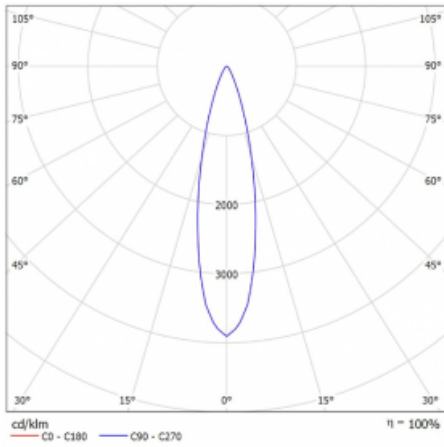

Luminaire power input* 5.9 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

☐ CE IP 20

*±10 %

Downloads

Installation instructions



Photos

