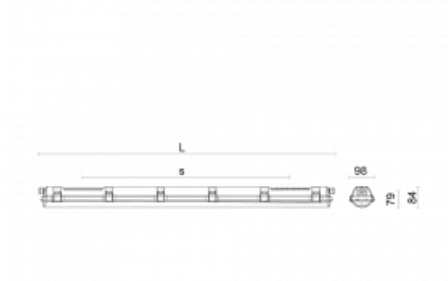



Luminaire

Kopti

900-200K-25GED/830, S

The product is only available on request.


Technical drawing


| | |
|------------------------------|-----------------------------|
| Type of installation | Surface, Suspended |
| Light distribution | Direct |
| Luminaire shape | Linear |
| Colour of the luminaires | Silver |
| Material | Plastic |
| Lifetime | L80/B20 50 000 hours |
| Warranty | 5 years |
| Description of luminaires | Luminaire surface/suspended |
| Dimensions (l × w × h mm) | 1455 mm × 98 mm × 84 mm |
| Light source | LED MODUL |
| DIR optical system | Opal diffuser |
| Luminous flux* | 3990 lm |
| Colour Temperature | 3000 K warm white |
| Luminous efficacy | 143 lm/W |
| Colour rendering index | 80 |
| Luminaire power input* | 28 W |
| Connection of the luminaires | DALI |
| Electrical voltage | 220-240V |
| Frequency | 50/60Hz |

 **IP 66**

*±10 %