



## Luminaire


# Kopti

900-200K-25GGD/830, S

The product is only available on request.



## Technical drawing

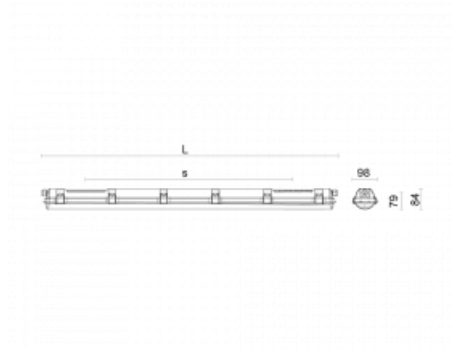

|                           |                             |
|---------------------------|-----------------------------|
| Type of installation      | Surface, Suspended          |
| Light distribution        | Direct                      |
| Luminaire shape           | Linear                      |
| Colour of the luminaires  | Silver                      |
| Material                  | Plastic                     |
| Lifetime                  | L80/B20 50 000 hours        |
| Warranty                  | 5 years                     |
| Description of luminaires | Luminaire surface/suspended |
| Dimensions                | 1455 mm × 98 mm × 84 mm     |
| Light source              | LED MODUL                   |

|                        |                   |
|------------------------|-------------------|
| Type of optical system | Opal diffuser     |
| Luminous flux*         | 5580 lm           |
| Colour Temperature     | 3000 K warm white |
| Luminous efficacy      | 147 lm/W          |
| Colour rendering index | 80                |

|                              |          |
|------------------------------|----------|
| Luminaire power input*       | 38 W     |
| Connection of the luminaires | DALI     |
| Electrical voltage           | 220-240V |
| Frequency                    | 50/60Hz  |

 **CE IP 66**

\*±10 %