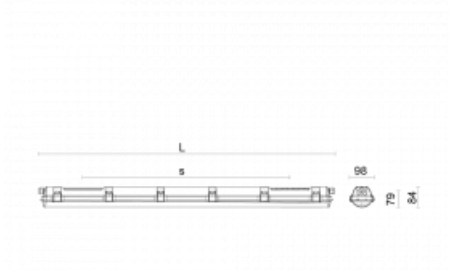



Luminaire

Kopti

900-200K-25GGM3/830, S

The product is only available on request.


Technical drawing


Type of installation	Surface, Suspended
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	Silver
Material	Plastic
Lifetime	L80/B20 50 000 hours
Warranty	2 years
Description of luminaires	Luminaire surface/suspended
Dimensions (l × w × h mm)	1455 mm × 98 mm × 84 mm
Light source	LED MODUL
DIR optical system	Opal diffuser
Luminous flux*	5580 lm
Colour Temperature	3000 K warm white
Luminous efficacy	147 lm/W
Colour rendering index	80
Luminaire power input*	38 W
Connection of the luminaires	ON/OFF + 3h emergency
Electrical voltage	220-240V
Frequency	50/60Hz

 **CE IP 66**

*±10 %