





Family

Flumo60-S


Based on the great success of Flumo100-S, we decided to create its little brother called Flumo60-S with a narrower profile of 60 mm for a more decent look. It is a linear aluminium profile that winds along the ceiling in a perfect curve and navigates you through the space. The Flumo60-S luminaires are available in both pendant and surface versions. Thanks to a wide range of radii and lengths, the luminaire can be used to create countless shapes of light objects. If we add the possibility of direct or direct-indirect distribution of light and two types of optical systems, we get a universal tool for illuminating social, public or commercial spaces.

| | |
|------------------------------|--------------------------------------|
| Type of installation | Surface, Suspended |
| Light distribution | Direct |
| Colour of the luminaires | Black, Silver, White |
| Colour Temperature | 3000 K warm white, 4000 K cool white |
| Material | Aluminium |
| Connection of the luminaires | ON/OFF |
| Lifetime | L80/B20 0 hours |

Luminaire family variants Flumo60-S

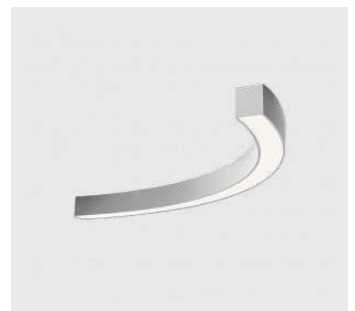

Flumo60-S

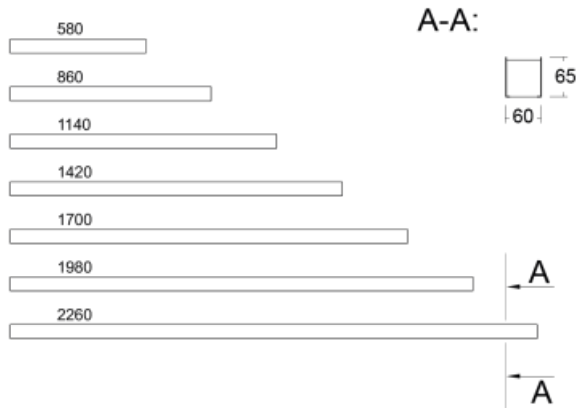

Assembly



Light distribution



Energy class

energy_class_g

Marks

Notes

Colour of the
luminaires



Colour Temperature

3000 K warm white
4000 K cool white

Optic system

Microprisma
Opal diffuser

Connection of the
luminaires


ON/OFF

Ra

80

End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

Flumo60-S

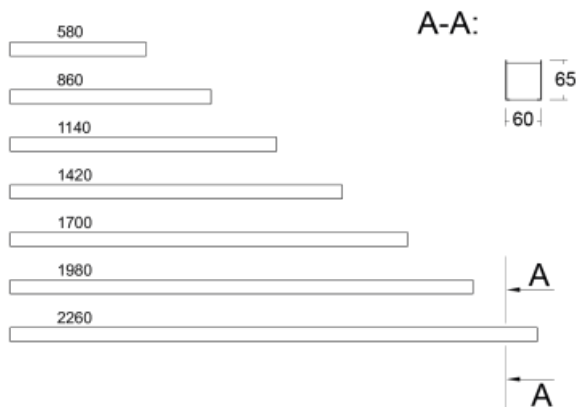

Assembly




Light distribution






Energy class


energy_class_g

Marks

| | | |
|---|------------------------------|---|
| Notes | Colour of the luminaires |  |
| | Colour Temperature | 3000 K warm white 4000 K cool white |
| | Optic system | Microprisma Opal diffuser |
| | Connection of the luminaires | ON/OFF |
| | Ra | 80 |
| End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers. | | |

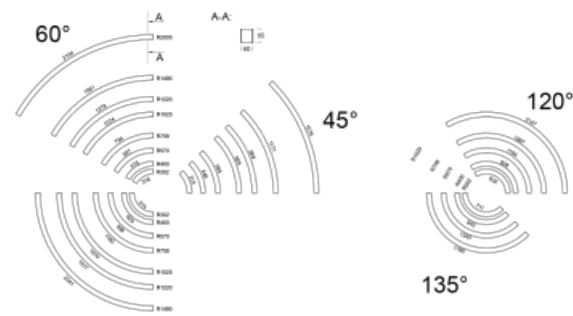Flumo60-S

| | | |
|--|---|--|
|  | Assembly | Light distribution |
| |  Energy class energy_class_g |  Marks |

| | | |
|---|------------------------------|---|
| Notes | Colour of the luminaires |  |
| | Colour Temperature | 3000 K warm white 4000 K cool white |
| | Optic system | Microprisma Opal diffuser |
| | Connection of the luminaires | ON/OFF |
| | Ra | 80 |
| End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers. | | |

Flumo60-S

| | | | | |
|---|------------------------------|--|--|--|
| <div></div> | Assembly | | Light distribution | |
| | <div></div> | | <div></div> | |
| | Energy class | | Marks | |
| | energy_class_g | | | |
| | | | | |
| Notes | Colour of the luminaires | | <div></div> | |
| | Colour Temperature | | 3000 K warm white 4000 K cool white | |
| | Optic system | | Microprisma Opal diffuser | |
| | Connection of the luminaires | | ON/OFF | |
| | Ra | | 80 | |
| End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers. | | | | |

Legend

Type of installation

| | | | |
|--|-------------------------|---|----------------------|
|  | Recessed lights |  | Wall mounted lights |
|  | Semi-recessed luminaire |  | Suspended lights |
|  | Surface lights |  | Free-standing lights |
|  | 3 circuit track lights |  | Table lamp lights |

Light distribution

| | |
|--|---------------------------|
|  | Direct luminaire |
|  | Direct-indirect luminaire |
|  | Indirect luminaire |

Light source

| | | | |
|--|---|---|---|
|  | Tunable White adjusting the color temperature |  | RealWhite true display of white color |
|  | RealColour true display of colors Ra≥97 |  | StrongColour highlight one color |

Marks

| | |
|--|---|
|  | Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable) |
|  | Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable) |
|  | Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation) |
|  | European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it |
|  | Luminaires are certified according to the European ENEC system |
|  | Recommended mounting hole size |

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

| | | | |
|----------|-------------------------------------|----------|---------------------------|
| B | Microprismatic system, low UGR | L | Plain aluminium reflector |
| C | Clear cover | M | Matt parabolic louvre |
| D | Asymmetric reflector | S | SPOT - narrow angle |
| E | Polished parabolic louvre, high LOR | U | MEDIUM - middle angle |
| F | FLOOD - wide angle | W | Wide beam angle |
| I | Microprismatic optical system | Z | Plastic louver, low UGR |
| K | Opal diffuser | | |

Electrical connection

| | | | |
|------------|---|-----------|---|
| /BT | Luminaires controlled via Bluetooth technology | P | Sensor and electronic ballast |
| D | DALI dimmable | T | By switch dimmable (touch dimm) |
| E | Electronic ballast non-dimmable | TD | DALI or by switch (touch dimm) dimmable |
| M | Electronic ballast non-dimmable with 1h emergency | U | Dimmable luminaire with dimmer on the luminaire |
| M3 | Electronic ballast non-dimmable with 3h emergency | | |

Colour

| | | | | | | | | |
|-------------|---|-----------------|-------------|---|-----------------|-------------|---|-----------------------|
| W |  | RAL 9003 | B |  | RAL 9005 | S |  | TIGER 09/90530 |
| 1021 |  | RAL 1021 | 2000 |  | RAL 2000 | 3020 |  | RAL 3020 |
| 5015 |  | RAL 5015 | 6018 |  | RAL 6018 | 7016 |  | RAL 7016 |
| 9006 |  | RAL 9006 | 9010 |  | RAL 9010 | | | |

Značky typu

| | |
|---|--|
|  | Smart – Luminaire or the lighting system controlled by motion, daylight or via smart devices using Bluetooth technology |
|  | Acoustic – Luminaire with acoustic absorption properties which reduce disturbing noise and improve the acoustics of the room |
|  | Multiwatt – Luminaires with individually adjustable luminous flux using a special antenna or mobile application |

UGR UGR – The luminaire suitable for office spaces