

Family

Global Trac





Type of installation Recessed, Surface, Suspended

Light distribution Direct




Colour of the
luminaires White

Material Aluminium

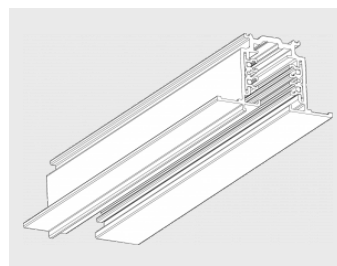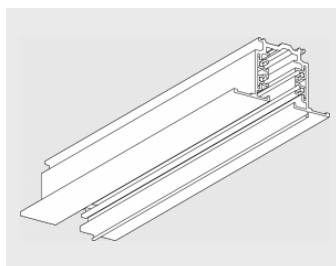


Luminaire family variants Global Trac





Global Trac on/off

		Assembly	Light distribution
			
		Energy class	Marks
		energy_class_g	
Notes	Colour of the luminaires		
	Ra	0	

Global Trac DALI

		Assembly	Light distribution
			
		Energy class	Marks
		energy_class_g	
Notes	Colour of the luminaires		
	Ra	0	

Global Trac on/off

		Assembly	Light distribution
			
		Energy class	Marks
		energy_class_g	

Notes	Colour of the luminaires	<div><div></div><div></div><div></div></div>
	Ra	0

Global Trac DALI

Assembly

Light distribution



Energy class


Marks

energy_class_g


Notes	Colour of the luminaires	<div><div></div><div></div><div></div></div>
	Ra	0

Legend

Type of installation

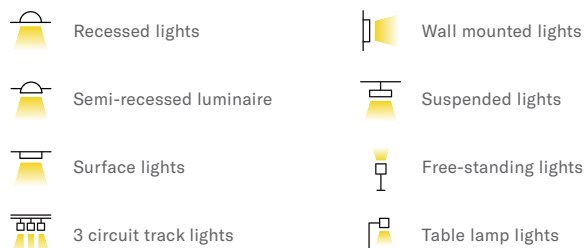


Light distribution



Light source



Marks

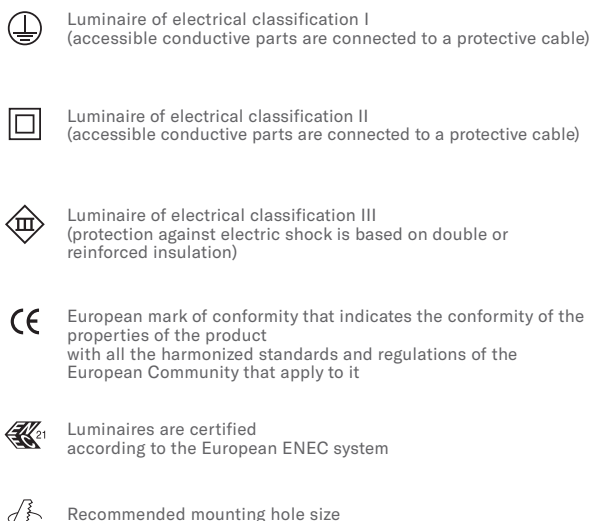

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

B	Microprismatic system, low UGR	L	Plain aluminium reflector
C	Clear cover	M	Matt parabolic louvre
D	Asymmetric reflector	S	SPOT - narrow angle
E	Polished parabolic louvre, high LOR	U	MEDIUM - middle angle
F	FLOOD - wide angle	W	Wide beam angle
I	Microprismatic optical system	Z	Plastic louver, low UGR
K	Opal diffuser		


Electrical connection

/BT	Luminaires controlled via Bluetooth technology	P	Sensor and electronic ballast
D	DALI dimmable	T	By switch dimmable (touch dimm)
E	Electronic ballast non-dimmable	TD	DALI or by switch (touch dimm) dimmable
M	Electronic ballast non-dimmable with 1h emergency	U	Dimmable luminaire with dimmer on the luminaire
M3	Electronic ballast non-dimmable with 3h emergency		

Colour

W	 RAL 9003	B	 RAL 9005	S	 TIGER 09/90530
1021	 RAL 1021	2000	 RAL 2000	3020	 RAL 3020
5015	 RAL 5015	6018	 RAL 6018	7016	 RAL 7016
9006	 RAL 9006	9010	 RAL 9010		

Značky typu

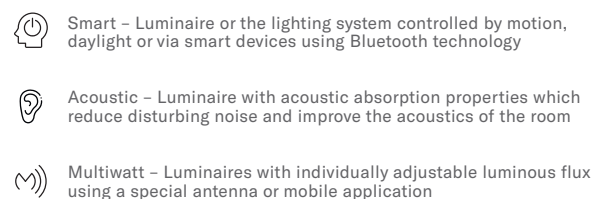

UGR UGR – The luminaire suitable for office spaces