



Family

Sant-S




reddot award 2015
winner


The Dutch designer Rob van Beek gave this linear luminaire with an opal diffuser a world-class look. In the Czech Republic, Sant-S has specially been made for LED sources and Human Centric Lighting technology. This means that the light changes its intensity and colour temperature according to circadian rhythms. People thus feel natural in a closed space because the lighting simulates daylight. If you are looking for system linear luminaires for an office, school or a hospital, you have just found them. The attractive design of the luminaire has been complemented with high efficiency of as much as 150 lm/W and low power consumption due to dimmability. The direct-indirect light shines pleasantly, increases the brightness of the background and thus improves visual comfort.

Type of installation	Surface, Suspended, 3 circuit track
Light distribution	Direct-indirect
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white, 2700 K - 6500 K Tunable White
Material	Aluminium
Light source	LED MODUL
LED type	Tunable White
MacAdam Light source	3
Connection of the luminaires	ON/OFF DALI ON/OFF + 1h emergency ON/OFF + 3h emergency DALI DT8
Lifetime	L80/B20 50 000 hours
Warranty	5 years

Luminaire family variants Sant-S

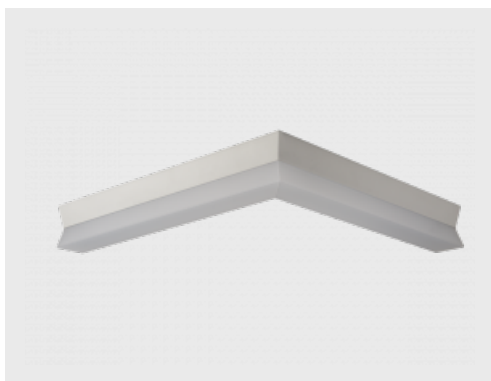

Sant-S

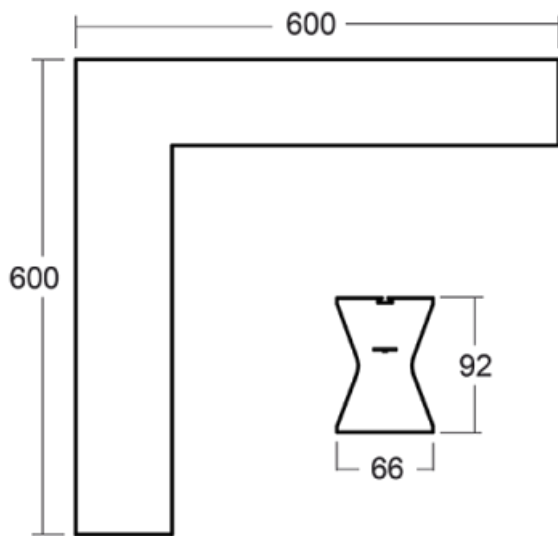

Assembly



Light distribution



Energy class

energy_class_g

Marks

Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
132S-520K-20GEE/840, W	603 × 603 × 92	18.8	2190	4000	< 22
132S-520K-20GGE/840, W	603 × 603 × 92	32.4	3550	4000	< 23.6

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes

Colour of the
luminaires



Colour Temperature

3000 K warm white
4000 K cool white
2700 K - 6500 K Tunable White

Optic system

Opal diffuser

Connection of the
luminaires


ON/OFF
DALI
DALI DT8

Ra

80
90

End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

Sant-S

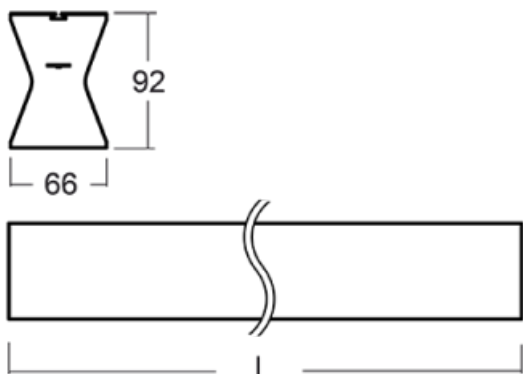

Assembly



Light distribution



Energy class

energy_class_g

Marks

Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
132S-500K-10GEE/840, W	562 × 66 × 92	9.4	1095	4000	< 21.9
132S-500K-10GGE/840, W	562 × 66 × 92	16.2	1770	4000	< 23.6
132S-500K-15GEE/840, W	842 × 66 × 92	14.1	1640	4000	< 21.9
132S-500K-15GGE/840, W	842 × 66 × 92	24.3	2660	4000	< 23.6
132S-500K-20GEE/840, W	1122 × 66 × 92	18.8	2190	4000	< 22
132S-500K-20GGE/840, W	1122 × 66 × 92	32.4	3550	4000	< 23.6
132S-500K-25GEE/840, W	1402 × 66 × 92	23.5	2730	4000	< 22
132S-500K-25GGE/840, W	1402 × 66 × 92	40.5	4430	4000	< 23.6
132S-500K-30GEE/840, W	1682 × 66 × 92	28.2	3280	4000	< 22
132S-500K-30GGE/840, W	1682 × 66 × 92	48.6	5320	4000	< 23.6
132S-500K-35GEE/840, W	1962 × 66 × 92	32.9	3830	4000	< 22
132S-500K-35GGE/840, W	1962 × 66 × 92	56.7	6210	4000	< 23.6
132S-500K-40GEE/840, W	2242 × 66 × 92	37.6	4380	4000	< 22
132S-500K-40GGE/840, W	2242 × 66 × 92	64.8	7100	4000	< 23.7

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes

Colour of the
luminaires



Colour Temperature

3000 K warm white
4000 K cool white
2700 K - 6500 K Tunable White

Optic system

Opal diffuser

Connection of the
luminaires

ON/OFF
DALI
ON/OFF + 1h emergency
ON/OFF + 3h emergency
DALI DT8

Ra

80
90

End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

Accessories



Code	Description
00-00300, N	wire suspension 2000mm
00-00301, N	wire suspension 4000mm
00-00302, N	wire suspension 6000mm



Code	Description
00-00350, K	cable 3x0,75 1000mm
00-00352, K	cable 3x0,75 2000mm
00-00354, K	cable 5x0,75 1000mm
00-00355, K	cable 5x0,75 2000mm



Code	Description
00-00370, W	ceiling cup 80x80x32mm

Notes

Accessories colour ☐


Code	Description
00-00600, F	ceiling fastening for luminaires 132-5xxK, 04-2000x, 05-2000x, 09-200x – 1 piece



Code	Description
00-51300, W	set for suspension into 3-phase track, non-dimmable luminaires

Notes

Accessories colour ☐



Code	Description
00-51301, W	set for suspension into 3-phase track, dimmable luminaires

Notes

Accessories colour



Code	Description
132-50031, W	pendant profile 1000 mm

Notes

Accessories colour



Code	Description
132-50100, W	end cap

Notes

Accessories colour



Code	Description
132-50200, F	straight connector



Code	Description
132-50201, F	straight connector (for dimmable lum.)



Code	Description
132-51100, K	diffuser 2295 mm

Legend

Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights

Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

Light source

	Tunable White adjusting the color temperature		RealWhite true display of white color
	RealColour true display of colors Ra≥97		StrongColour highlight one color

Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

B	Microprismatic system, low UGR	L	Plain aluminium reflector
C	Clear cover	M	Matt parabolic louvre
D	Asymmetric reflector	S	SPOT - narrow angle
E	Polished parabolic louvre, high LOR	U	MEDIUM - middle angle
F	FLOOD - wide angle	W	Wide beam angle
I	Microprismatic optical system	Z	Plastic louver, low UGR
K	Opal diffuser		

Electrical connection

/BT	Luminaires controlled via Bluetooth technology	P	Sensor and electronic ballast
D	DALI dimmable	T	By switch dimmable (touch dimm)
E	Electronic ballast non-dimmable	TD	DALI or by switch (touch dimm) dimmable
M	Electronic ballast non-dimmable with 1h emergency	U	Dimmable luminaire with dimmer on the luminaire
M3	Electronic ballast non-dimmable with 3h emergency		

Colour

W	 RAL 9003	B	 RAL 9005	S	 TIGER 09/90530
1021	 RAL 1021	2000	 RAL 2000	3020	 RAL 3020
5015	 RAL 5015	6018	 RAL 6018	7016	 RAL 7016
9006	 RAL 9006	9010	 RAL 9010		

Značky typu

	Smart – Luminaire or the lighting system controlled by motion, daylight or via smart devices using Bluetooth technology
	Acoustic – Luminaire with acoustic absorption properties which reduce disturbing noise and improve the acoustics of the room
	Multiwatt – Luminaires with individually adjustable luminous flux using a special antenna or mobile application

UGR UGR – The luminaire suitable for office spaces