



## Luminaire

# Rundo 62

190-281K-10GEE/840, B




Circular luminaires with an aluminium profile come in height 62 mm feature an excellent efficacy of up to 145 lm/W, which can give the space lightness and appeal. The luminaires are pendant or flush-mounted, with direct or direct-indirect distribution of light creating an interesting light halo. A circular luminaire with a PMMA opal diffuser or microprismatic optical system is suitable for both commercial spaces and households. A playful and interesting effect can be created by combining different diameters. Luminaires can be equipped with a motion sensor, daylight sensor or Bluetooth technology, which allows easy control of the luminaire from your smart device.

## Technical drawing



|   |                                     |
|---|-------------------------------------|
| Type of installation                      | Surface, Wall mounted               |
| Light distribution                        | Direct-indirect                     |
| Luminaire shape                           | Circular                            |
| Colour of the luminaires                  | Black                               |
| Material                                  | Aluminium                           |
| Lifetime                                  | L90/B50 50 000 hours                |
| Warranty                                  | 5 years                             |
| Description of luminaires                 | Luminaire surface/wall mounted      |
| Dimensions                                | $\varnothing$ 850 mm $\times$ 62 mm |
| Weight                                    | 11.6 kg                             |
| Light source                              | LED MODUL                           |
| Type of optical system                    | Opal diffuser                       |
| Luminous flux*                            | 6700 lm                             |
| Colour Temperature                        | 4000 K cool white                   |
| Luminous efficacy                         | 137 lm/W                            |
| MacAdam Light source                      | 3                                   |
| Colour rendering index                    | 80                                  |
| UGR max. X=4H<br>Y=8H, $\varrho=70,50,20$ | 20.2                                |

## Curve

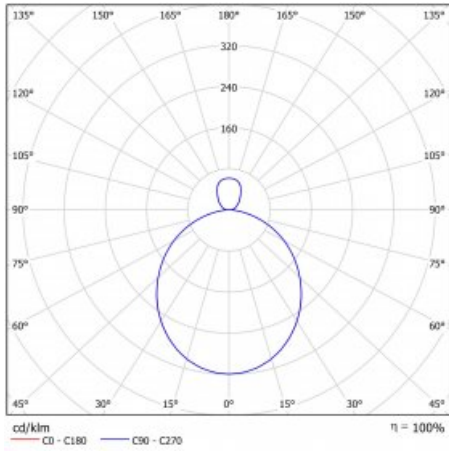

Luminaire power input\* 48.9 W

Connection of the luminaires ON/OFF

Electrical voltage 220-240V

Frequency 50/60Hz

   IP 40

\* $\pm 10\%$

