



## Luminaire

# Rundo 87



191-260I-10GGM3I/840, S



Circular luminaires with an aluminium profile with a height of 87 mm and an excellent luminous efficacy of up to 145 lm/W. A Rundo87 family not only by its name, but also in terms of its functions and dimensions with a diameter of up to 1150 mm. These surface or pendant luminaires can be used as basic lighting features in commercial and residential spaces. Thanks to sophisticated technology, the luminaires do not cause glare and the lighting can be adapted to smaller or large commercial spaces. You can choose between a version with an opal diffuser made of PMMA or a microprismatic optical system.

|                                   |                                |
|-----------------------------------|--------------------------------|
| Type of installation              | Surface, Wall mounted          |
| Light distribution                | Direct                         |
| Luminaire shape                   | Circular                       |
| Colour of the luminaires          | Silver                         |
| Material                          | Aluminium                      |
| Lifetime                          | L80/B20 50 000 hours           |
| Warranty                          | 2 years                        |
| Description of luminaires         | Luminaire surface/wall mounted |
| Dimensions                        | ø 600 mm × 87 mm               |
| Weight                            | 7.1 kg                         |
| Light source                      | LED MODUL                      |
| DIR optical system                | Microprisma                    |
| Luminous flux*                    | 4500 lm                        |
| Colour Temperature                | 4000 K cool white              |
| Luminous efficacy                 | 103 lm/W                       |
| MacAdam Light source              | 3                              |
| Colour rendering index            | 80                             |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 18.1                           |

## Technical drawing



Luminaire power input\* 43.7 W

Connection of the luminaires ON/OFF + 3h emergency


Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 40

\* $\pm 10\%$

## Curve

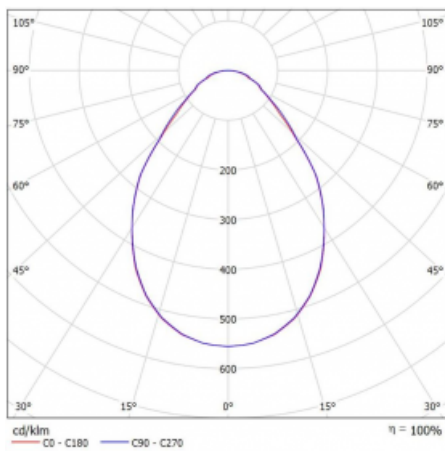

## Downloads

[Installation instructions](#)[Photos](#)