



## Luminaire


# Ineli

235-571I-20GGD/830, W



Pendant luminaire with a transparent optical system, two luminous fluxes and a height of only 27 mm, which is best used in an office. The Ineli luminaire with direct-indirect distribution of light will catch your eye with its low aluminium profile, forming the frame of the lighting area. Thanks to its superior technical features, it can also make every meeting room, informal café or relaxation zone more pleasant. Thanks to the fact that the power is supplied via suspension wires, there is no need for a power cable. The luminaire can be hung horizontally or at any angle, which gives the space an impression of uniqueness and airiness. In addition, it can be perfectly combined with the free-standing version, i.e. the Sineli luminaire.

## Technical drawing

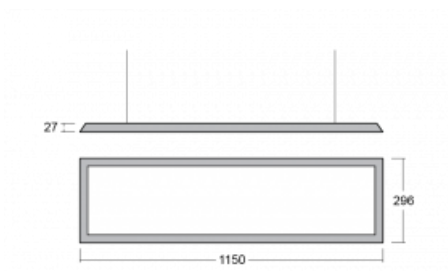

|  |                          |
|--|--------------------------|
| Type of installation                   | Suspended                |
| Light distribution                     | Direct-indirect          |
| Luminaire shape                        | Angular                  |
| Colour of the luminaires               | White                    |
| Material                               | Aluminium                |
| Lifetime                               | L80/B20 50 000 hours     |
| Warranty                               | 5 years                  |
| Description of luminaires              | Luminaire suspended      |
| Dimensions                             | 1150 mm × 296 mm × 27 mm |
| Weight                                 | 6.7 kg                   |
| Light source                           | LED MODUL                |
| Type of optical system                 | Microprisma              |
| Luminous flux*                         | 6660 lm                  |
| Colour Temperature                     | 3000 K warm white        |
| Luminous efficacy                      | 141 lm/W                 |
| MacAdam Light source                   | 3                        |
| Colour rendering index                 | 80                       |
| UGR max. X=4H<br>Y=8H, $\rho=70,50,20$ | 15.4                     |

## Curve



Luminaire power input\* 47.2 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\*±10 %

## Downloads

[Installation instructions](#)[Photos](#)