


**Luminaire**

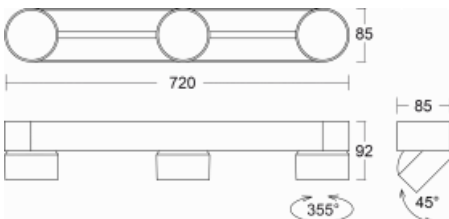
# Shift

26-500W-30GDD/930, W



Designer Kryštof Nosál has created a luminaire with unrivalled variability. In addition, the Shift family of single luminaires allows for any method of installation. You can choose between a semi-recessed, surface and pendant version. The spot LED luminaire consists of 1, 2, 3 or 5 light sources, which can be moved along the axis of the luminaire body, tilted up to an angle of 45° and rotated up to 355°. The luminaire has 4 beam angles of 15°, 25°, 36°, 60°.

Design Kryštof Nosál

**Technical drawing**


|                                   |                        |
|-----------------------------------|------------------------|
| Type of installation              | Suspended              |
| Light distribution                | Direct                 |
| Luminaire shape                   | Rounded                |
| Colour of the luminaires          | White                  |
| Material                          | Aluminium              |
| Lifetime                          | L80/B20 50 000 hours   |
| Warranty                          | 5 years                |
| Description of luminaires         | Luminaire suspended    |
| Dimensions                        | 720 mm × 85 mm × 92 mm |
| Light source                      | LED MODUL              |
| Type of optical system            | Reflector              |
| Luminous flux*                    | 1000 lm                |
| Colour Temperature                | 3000 K warm white      |
| Luminous efficacy                 | 108 lm/W               |
| MacAdam Light source              | 3                      |
| Colour rendering index            | 90                     |
| Beam angle                        | 52°                    |
| UGR max. X=4H<br>Y=8H, ρ=70,50,20 | 17.2                   |

## Curve



Luminaire power input\* 27.9 W

Connection of the luminaires DALI

Electrical voltage 220-240V

Frequency 50/60Hz

⊕ CE IP 20

\*±10 %

## Downloads

Installation instructions



Photos



**Accessories****00-01000**  
reflector 18°**00-01001**  
reflector 25°**00-01002**  
reflector 32°**00-01003**  
reflector 52°**00-01100**  
Satinice diffuser**00-01101**  
Linear optic