



Luminaire


Styrk

86-200D-30GGE/840, W



The focus on performance is ever greater. No wonder nowadays - that's why we come up with Styrk technical luminaires. They meet strict criteria and have a wide range of applications. They stand out with a luminous flux of 5000 lm/m and a specific luminous flux of 145 lm/w while meeting IP54. Equipped with opal, microprism or PMA, these pendant luminaires can also be easily connected via a connector system. In addition, they can withstand high ambient temperatures of up to 40° C. They are suitable for business centres, data centres and large production halls.

Technical drawing

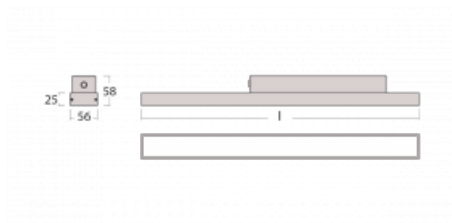

Type of installation	Surface
Light distribution	Direct
Luminaire shape	Linear
Colour of the luminaires	White
Material	Aluminium
Lifetime	L90/B50 50 000 hours
Warranty	5 years
Description of luminaires	Luminaire surface
Dimensions (l × w × h mm)	1688 mm × 56 mm × 58 mm
Light source	LED MODUL
DIR optical system	Asymmetric reflector
Luminous flux* při 25°C	4130 lm
Colour Temperature	4000 K cool white
Luminous efficacy	127 lm/W
MacAdam Light source	3
Colour rendering index	80
Luminaire power input*	32.4 W
Connection of the luminaires	ON/OFF
Electrical voltage	220-240V
Frequency	50/60Hz

  IP 54

*±10 %

Curve



Downloads

[Installation instructions](#)[Photos](#)