



Family

Lina35-S


The linear system luminaires of the Lina35-S family provide one of the thinnest profiles in our product range. The luminaires with direct distribution of light are available in the pendant, surface, and recessed versions for ceiling installations and can also be mounted on the wall. In any case, you can line the luminaires up in a row thus creating the ideal length to meet your needs. Thanks to the option to extend and retract the opal diffuser, you can find the ideal combination of lights for a specific interior according to your needs. Thanks to this variability, Lina35-S can be used in virtually any area, but especially in the social, public and commercial ones. Luminaires with an extended diffuser diffuse their light into a significantly larger area thus helping to soften the entire interior.

Type of installation	Recessed, Surface, Suspended
Light distribution	Direct
Colour of the luminaires	Black, Silver, White
Colour Temperature	3000 K warm white, 4000 K cool white
Material	Aluminium
Light source	LED MODUL
MacAdam Light source	2
Connection of the luminaires	ON/OFF DALI
Lifetime	L90/B50 50 000 hours
Warranty	5 years

Luminaire family variants Lina35-S



Lina35-S

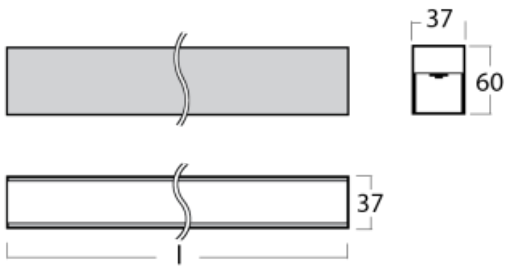

Assembly



Light distribution




Energy class

energy_class_g

Marks




Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
35S-200K-10GEE/840, W	561 × 37 × 60	7.7	720	4000	< 25.3
35S-200K-10GGE/840, W	561 × 37 × 60	11	990	4000	< 26.4
35S-200K-15GEE/840, W	842 × 37 × 60	11.6	1090	4000	< 25.3
35S-200K-15GGE/840, W	842 × 37 × 60	17.7	1490	4000	< 26.4
35S-200K-20GEE/840, W	1122 × 37 × 60	15.5	1450	4000	< 25.3
35S-200K-20GGE/840, W	1122 × 37 × 60	22	1990	4000	< 26.4
35S-200K-25GEE/840, W	1403 × 37 × 60	19.3	1820	4000	< 25.3
35S-200K-25GGE/840, W	1403 × 37 × 60	27.6	2490	4000	< 26.4
35S-200K-30GEE/840, W	1683 × 37 × 60	23.2	2180	4000	< 25.3
35S-200K-30GGE/840, W	1683 × 37 × 60	33.1	2990	4000	< 26.4
35S-200K-35GEE/840, W	1964 × 37 × 60	27	2550	4000	< 25.3
35S-200K-35GGE/840, W	1964 × 37 × 60	38.6	3490	4000	< 26.4
35S-200K-40GEE/840, W	2244 × 37 × 60	30.9	2910	4000	< 25.3
35S-200K-40GGE/840, W	2244 × 37 × 60	46	3980	4000	< 26.4
35S-200K-50GEE/840, W	2805 × 37 × 60	38.6	3640	4000	< 25.3
35S-200K-50GGE/840, W	2805 × 37 × 60	55.1	4980	4000	< 26.4
35S-200K-60GEE/840, W	3366 × 37 × 60	46.4	4370	4000	< 25.3
35S-200K-60GGE/840, W	3366 × 37 × 60	66.1	5980	4000	< 26.4
35S-200K-80GEE/840, W	4488 × 37 × 60	61.8	5820	4000	< 25.3
35S-200K-80GGE/840, W	4488 × 37 × 60	88.2	7970	4000	< 26.4

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Opal diffuser
	Connection of the luminaires	ON/OFF DALI
	Ra	80


End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

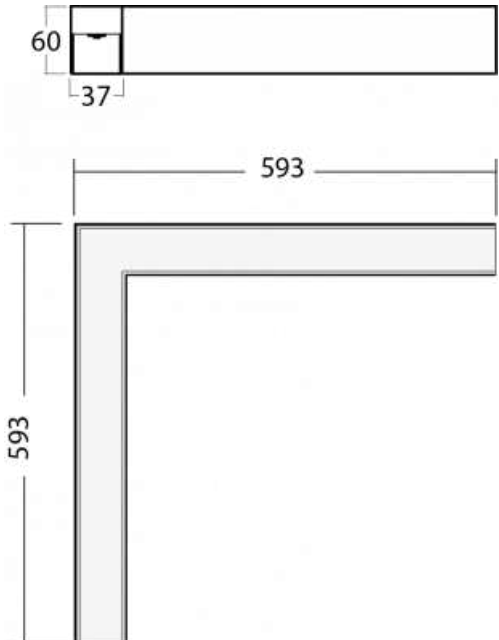Lina35-S

	Assembly	Light distribution
		
	Energy class	Marks
	energy_class_g	


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
35S-220K-20GEE/840, W	593 × 593 × 60	15.5	1450	4000	< 25.3
35S-220K-20GGE/840, W	593 × 593 × 60	22	1990	4000	< 26.4

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Opal diffuser
	Connection of the luminaires	ON/OFF DALI
	Ra	80

End caps, suspensions, supply cables, and ceiling cup for luminaires must be ordered separately. To connect into systems, please order the respective number of couplers.

Lina35-S

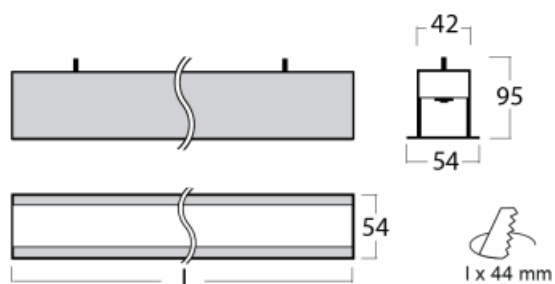

Assembly



Energy class

energy_class_g


Light distribution



Marks


Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
35S-000K-10GEE/840, W	561 × 54 × 95	7.7	720	4000	< 25.5
35S-000K-10GGE/840, W	561 × 54 × 95	11	990	4000	< 26.6
35S-000K-15GEE/840, W	842 × 54 × 95	11.6	1090	4000	< 25.5
35S-000K-15GGE/840, W	842 × 54 × 95	16.5	1490	4000	< 26.6
35S-000K-20GEE/840, W	1122 × 54 × 95	15.5	1450	4000	< 25.3
35S-000K-20GGE/840, W	1122 × 54 × 95	23.9	1990	4000	< 26.4
35S-000K-25GEE/840, W	1403 × 54 × 95	19.3	1820	4000	< 25.3
35S-000K-25GGE/840, W	1403 × 54 × 95	27.6	2490	4000	< 26.4
35S-000K-30GEE/840, W	1683 × 54 × 95	23.2	2180	4000	< 25.3
35S-000K-30GGE/840, W	1683 × 54 × 95	33.1	2990	4000	< 26.4
35S-000K-35GEE/840, W	1964 × 54 × 95	27	2550	4000	< 25.3
35S-000K-35GGE/840, W	1964 × 54 × 95	38.6	3490	4000	< 26.4
35S-000K-40GEE/840, W	2244 × 54 × 95	30.9	2910	4000	< 25.3
35S-000K-40GGE/840, W	2244 × 54 × 95	46	3980	4000	< 26.4

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes	Colour of the luminaires	
	Colour Temperature	3000 K warm white 4000 K cool white
	Optic system	Opal diffuser
	Connection of the luminaires	ON/OFF DALI
	Ra	80

The appropriate quantity of terminals must be ordered for the luminaires. Order the appropriate quantity of connectors for connecting in the series.

Lina35-S

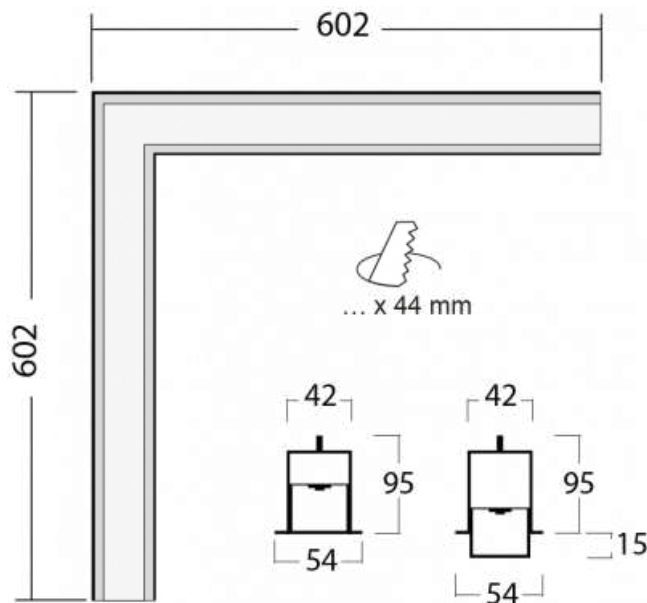

Assembly



Light distribution



Energy class

energy_class_g

Marks

Code	Dimensions l/w/h (mm)	Power of the luminaire (W)	Luminous flux (lm)	Colour Temperature (K)	UGR
35S-020K-20GEE/840, W	603 × 603 × 95	15.5	1450	4000	< 25.5
35S-020K-20GGE/840, W	603 × 603 × 95	22	1990	4000	< 26.6

AnThese codes represent white luminaires with chromaticity temperature 4000K and opal diffuser.

Notes

Colour of the
luminaires



Colour Temperature

3000 K warm white
4000 K cool white

Optic system

Opal diffuser

Connection of the
luminaires

ON/OFF
DALI

Ra

80

The appropriate quantity of terminals must be ordered for the luminaires. Order the appropriate quantity of connectors for connecting in the series.

Accessories



Code	Description
00-00350, K	cable 3x0,75 1000mm, transparent
00-00352, K	cable 3x0,75 2000mm, transparent
00-00354, K	cable 5x0,75 1000mm, transparent
00-00355, K	cable 5x0,75 2000mm, transparent
00-00356, K	cable 5x0,75 4000mm, transparent
00-00357, K	cable 5x0,75 6000mm, transparent
00-00358, K	cable 3x0,75 4000mm, transparent
00-00360, K	cable 3x0,75 6000mm, transparent



Code	Description
00-00370, W	ceiling cup 80x80x32mm

Notes

Accessories colour






Legend

Type of installation

	Recessed lights		Wall mounted lights
	Semi-recessed luminaire		Suspended lights
	Surface lights		Free-standing lights
	3 circuit track lights		Table lamp lights

Light distribution

	Direct luminaire
	Direct-indirect luminaire
	Indirect luminaire

Light source

	Tunable White adjusting the color temperature		RealWhite true display of white color
	RealColour true display of colors Ra≥97		StrongColour highlight one color

Marks

	Luminaire of electrical classification I (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification II (accessible conductive parts are connected to a protective cable)
	Luminaire of electrical classification III (protection against electric shock is based on double or reinforced insulation)
	European mark of conformity that indicates the conformity of the properties of the product with all the harmonized standards and regulations of the European Community that apply to it
	Luminaires are certified according to the European ENEC system
	Recommended mounting hole size

IPxy IP code indicating the degree of protection of live parts

EAC Eurasian Conformity

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

11S-501I-20GGE/840, W

Optic system

Electrical connection

Colour

Optic system

B	Microprismatic system, low UGR	L	Plain aluminium reflector
C	Clear cover	M	Matt parabolic louvre
D	Asymmetric reflector	S	SPOT - narrow angle
E	Polished parabolic louvre, high LOR	U	MEDIUM - middle angle
F	FLOOD - wide angle	W	Wide beam angle
I	Microprismatic optical system	Z	Plastic louver, low UGR
K	Opal diffuser		

Electrical connection

/BT	Luminaires controlled via Bluetooth technology	P	Sensor and electronic ballast
D	DALI dimmable	T	By switch dimmable (touch dimm)
E	Electronic ballast non-dimmable	TD	DALI or by switch (touch dimm) dimmable
M	Electronic ballast non-dimmable with 1h emergency	U	Dimmable luminaire with dimmer on the luminaire
M3	Electronic ballast non-dimmable with 3h emergency		

Colour

W		B		S	
1021		2000		3020	
5015		6018		7016	
9006		9010			

Značky typu

	Smart – Luminaire or the lighting system controlled by motion, daylight or via smart devices using Bluetooth technology
	Acoustic – Luminaire with acoustic absorption properties which reduce disturbing noise and improve the acoustics of the room
	Multiwatt – Luminaires with individually adjustable luminous flux using a special antenna or mobile application

UGR UGR – The luminaire suitable for office spaces